



Taiwan Sheng Li Energy Saving Technology

The largest domestic manufacturer of air circulation and temperature lowering equipment (RD/Manufacturing)

- Energy saving and carbon reduction
- Enhance work efficiency
- Do the best for environmental protection



Official website



FB fans page



Shih-Hsuan Chang +886-905-362065

Professional manufacturer:

Industrial water cooling fan/variable frequency fan/air circulation equipment

Address: 41263 No. 11, lane 100, Tsao-Ti Road, Dali District, Taichung City

Uniform no.27664156

Mail: jc94motor@gmail.com

<https://www.jc-motor.com.tw>



JIN CHENG ELECTRICAL ENGINEERING CO.,LTD

First plant: No. 11, lane 100, Tsao-Ti Road, Dali District, Taichung City

Factory planning hot line: 0800-528178

TEL : +886-4-24960269

FAX: +886-4-24960557

E-mail: jc94motor@gmail.com



BLDC Permanent Magnet Variable Frequency Mobile Water cooling fan

Manufactured in Taiwan, professional production and quality warranty

DC-035



DC-05S




Color

DC-10S



Color

DC-11 double layer

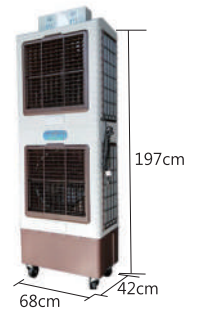

Item	DC variable frequency
Model no.	DC-035
Horse power	1/4HP
Voltage	110V
Power consumption	130W
Ampere	1.5A
Max. airflow	3500m ³ /H
Air flow distance	10m
Wind speed switching	6 sections
Vane	Blower type
Swing leaves	Internal and external electric swing leaves
Weight	45kg
Water tank	20L
Water consumption	1~2L/H
Noise	≤ 50dB
Dimension	W38.5xD36.5xH102cm

Item	DC variable frequency
Model no.	DC-05S
Horse power	1/4HP
Voltage	110V
Power consumption	160W
Ampere	1.8A
Max. airflow	6000m ³ /H
Air flow distance	12m
Wind speed switching	6 sections
Vane	16"
Swing leaves	Internal electric swing leaves
Weight	22kg
Water tank	56L
Water consumption	3~4L/H
Noise	≤ 55dB(measured at a distance of 3m)
Dimension	W68xD43xH123cm

Item	DC variable frequency
Model no.	DC-10S
Horse power	1/3HP
Voltage	110V
Power consumption	200W
Ampere	2.7A
Max. airflow	9000m ³ /H
Air flow distance	15m
Wind speed switching	5 sections
Vane	20"
Swing leaves	Internal electric swing leaves
Weight	32.5kg
Water tank	70.5L
Water consumption	5~10L/H
Noise	≤ 65dB
Dimension	W84xD47xH130cm

Item	DC variable frequency
Model no.	DC-11
Horse power	1/4HP X2
Voltage	110V
Power consumption	300W
Ampere	3A
Max. airflow	8500m ³ /H
Air flow distance	15m
Wind speed switching	6 sections
Vane	16"
Swing leaves	Internal electric swing leaves
Weight	40kg
Water tank	50L
Water consumption	8~10L/H
Noise	≤ 60dB
Dimension	W68xD42xH197cm

DC-15



DC-22



Mobile environment friendly air conditioner



Dry/wet vacuum cleaner



Item	DC variable frequency
Model no.	DC-15
Horse power	3/4HP
Voltage	110V/220V
Power consumption	510W
Ampere	5.2A/2.8A
Max. airflow	15000m ³ /H
Air flow distance	16m
Wind speed switching	6 sections
Vane	24"
Swing leaves	Internal electric swing leaves
Weight	48kg
Water tank	100L
Water consumption	8~20L/H
Noise	≤ 63dB
Dimension	W93xD58xH158cm

Item	DC variable frequency
Model no.	DC-22
Horse power	1HP
Voltage	110V/220V
Power consumption	730W/640W
Ampere	7A/4.5A
Max. airflow	22000m ³ /H
Air flow distance	20m
Wind speed switching	6 sections
Vane	30"
Swing leaves	Internal electric swing leaves
Weight	65kg
Water tank	120L
Water consumption	8~20L/H
Noise	≤ 68dB(measured at a distance of 3m)
Dimension	W113xD69xH169cm

Item	DC variable frequency
Model no.	Environment friendly air conditioner - mobile
Voltage	220V single phase/ three phases
Power	750W
Power consumption	1200W
Ampere	4.5A/3A
Max. airflow	22000m ³ /H
Air flow distance	30m
Circulation water volume	70L
Vane	24"
Weight	77kg
Noise	≤ 70dB
RPM	860
Dimension	W110xD96xH128cm

Item	AC current
Model no.	Dry/wet vacuum cleaner
Voltage	110V
Power consumption	1200W
Weight	6.6kg
Dimension	W37xD37xH51cm



Mobile water cooling fan

MIT (Made in Taiwan) / Energy saving and environment friendly





Item	DC variable frequency
Model no.	PA24L
Product name	24 inch single round net standing fan (swing head type)
Horse power	1/3HP
Voltage	110/220V
Power consumption	200W
Ampere	1.6A/0.8A
Max.airflow	10000m ³ /H
Air flow distance	20m
Wind speed switching	6 sections
Vane	20"
Weight	16Kg
Noise	≤60dB
Dimension	W80XD75XH115cm
Commercial inspection	R63369

Item	AC current
Model no.	JC-05
Horse power	1/4HP
Voltage	110V
Power consumption	210W
Ampere	1.8A
Max.airflow	6000m ³ /H
Air flow distance	12m
Wind speed switching	3 sections
Vane	16"
Swing leaves	Internal electric swing leaves
Weight	21Kg
Water tank	56L
Water consumption	2~3L/H
Noise	≤65dB
Dimension	W68XD43XH123cm

Item	AC current
Model no.	JC-05S
Horse power	1/4HP
Voltage	110V
Power consumption	210W
Ampere	1.8A
Max.airflow	5000m ³ /H
Air flow distance	12m
Wind speed switching	3 sections
Vane	16"
Swing leaves	Internal electric swing leaves
Weight	21Kg
Water tank	56L
Water consumption	2~3L/H
Noise	≤65dB
Dimension	W68XD43XH123cm

Item	AC current
Model no.	JC-10S
Horse power	1/3HP
Voltage	110V
Power consumption	250W
Ampere	2.8A
Max.airflow	8000m ³ /H
Air flow distance	13m
Wind speed switching	3 sections
Vane	20"
Swing leaves	Internal electric swing leaves
Weight	33.5Kg
Water tank	70.5L
Water consumption	5~10L/H
Noise	≤68dB
Dimension	W84XD47XH130cm

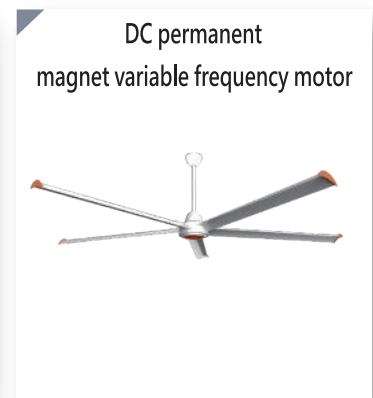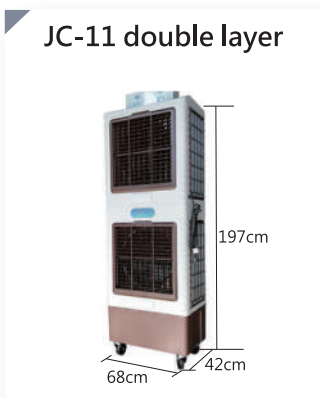

Item	AC current
Model no.	JC-11
Horse power	1/4HP X2
Voltage	110V
Power consumption	330W
Ampere	3A
Max. airflow	8000m ³ /H
Air flow distance	15m
Wind speed switching	3 sections
Vane	16"
Swing leaves	Internal electric swing leaves
Weight	40kg
Water tank	50L
Water consumption	8~10L/H
Noise	≤ 65dB
Dimension	W68xD42xH197cm

Item	AC current
Model no.	JC-11-1
Horse power	1/3HP
Voltage	110V
Power consumption	180W
Ampere	1.5A
Max. airflow	10000m ³ /H
Air flow distance	10m
Wind speed switching	4 sections(including mute)
Vane	Blower type
Swing leaves	Internal electric swing leaves
Weight	22kg
Water tank	50L
Water consumption	5~7L/H
Noise	≤63dB
Dimension	W50xD40.5xH161cm

Item	AC current
Model no.	JC-15 high water tank
Horse power	3/4HP
Voltage	110/220V
Power consumption	740W
Ampere	6.9A
Max. airflow	12000m ³ /H
Air flow distance	15m
Wind speed switching	3 sections
Vane	24"
Swing leaves	Internal electric swing leaves
Weight	48kg
Water tank	100L
Water consumption	8~20L/H
Noise	≤68dB
Dimension	W93xD58xH158cm

Item	DC permanent magnet variable frequency motor
Model no.	WYDS-A4280M
Voltage	220V
Power consumption	750W
Maximal rotational speed	80rpm
Max. airflow	5213m ³ /H
Number of vane	6pcs
Noise level	≤40dB
Weight	48Kg
Outer diameter	4.28m



BLDC DC permanent magnet variable frequency / Mobile blower

MIT (Made in Taiwan) / Energy saving and environment friendly

PD18F / PA18F




Item	DC variable frequency	AC current
Model no.	PD18F	PA18F
Product name	18 inch multi-function electric fan tool cart	
Horse power	1/3HP	1/4HP
Voltage	110V	
Power consumption	220W	270W
Ampere	3A	
Max. airflow	6652m ³ /H	8000m ³ /H
Air flow distance	20m	
Wind speed switching	6 sections	3 sections
Vane	18" (plastic steel)	
Weight	47kg	
Noise	≤65dB	
Dimension	W52XD40XH114CM	
Hanging back panel (Optional)	W51XD40XThickness 2CM	

PD24Y / PA22Y




Item	DC variable frequency	AC current
Model no.	PD24Y	PA22Y
Product name	24 inch round positive pressure blower	
Horse power	3/4HP	
Voltage	110/220V	
Power consumption	350W	600W
Ampere	4.1A/2A	5.5A
Max. airflow	13000m ³ /H	12000m ³ /H
Air flow distance	23m ↑	
Wind speed switching	6 sections	3 sections
Vane	24" (plastic steel)	22" (plastic steel)
Weight	38kg	
Noise	≤68dB	
Dimension	W75xD57xH123cm	

PD30Y

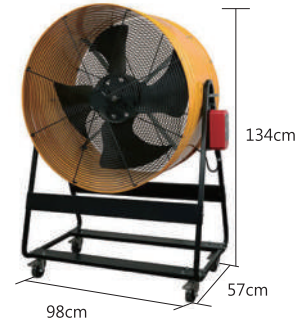


Item	DC variable frequency
Model no.	PD30Y
Product name	30 inch round positive pressure blower
Horse power	1HP
Voltage	110/220V
Power consumption	610W
Ampere	7.3A/4.5A
Max. airflow	24000m ³ /H
Air flow distance	30m
Wind speed switching	6 sections
Vane	30" (plastic steel)
Weight	42kg
Noise	≤65dB
Dimension	W98xD57xH134cm

PD30F / PA30F

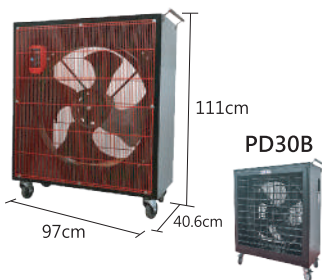


Item	DC variable frequency	AC current
Model no.	PD30F	PA30F
Product name	30 inch blower square positive pressure	
Horse power	1HP	3/4HP
Voltage	110/220V	110V
Power consumption	610W	730W
Ampere	7.3A/4.8A	7.0A
Max. airflow	24000m ³ /H	18000m ³ /H
Air flow distance	30m	
Wind speed switching	6 sections	3 sections
Vane	30" (plastic steel)	
Weight	45.5kg	
Noise	≤65dB	
Dimension	W97XD40.6XH111CM	

PD42F

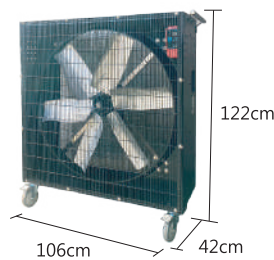

Item	DC variable frequency
Model no.	PD42F
Product name	42 inch square positive pressure blower
Horse power	1.1/4HP
Voltage	110/220V
Power consumption	610W
Ampere	7.3A/4.5A
Max. airflow	26000m ³ /H
Air flow distance	35m ↑
Wind speed switching	6 sections
Vane	36" (stainless steel)
Weight	60kg
Noise	≤65dB
Dimension	W106xD42xH122cm

PD42T

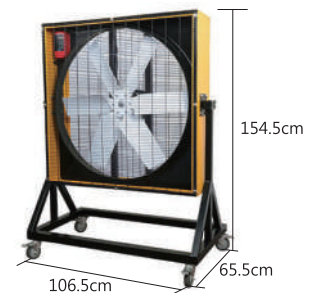


Item	DC variable frequency
Model no.	PD42T
Product name	42 inch square cart electric fan
Horse power	1.1/4HP
Voltage	110/220V
Power consumption	610W
Ampere	7.3A/3.6A
Max. airflow	26000m ³ /H
Air flow distance	30m
Wind speed switching	6 sections
Vane	36" (stainless steel)
Weight	65kg
Noise	≤68dB
Dimension	W106.5xD65.5xH154.5cm



Mobile blower / Negative pressure electric fan series


MIT (Made in Taiwan) / Energy saving and environment friendly

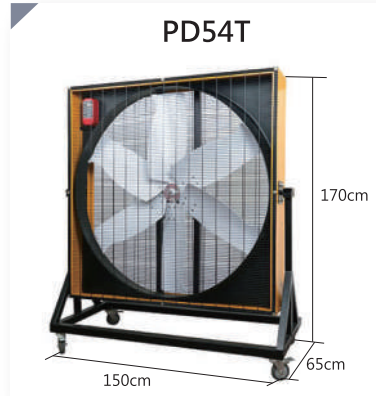

Item	DC variable frequency
Model no.	PD49Y
Product name	49 inch blower
Horse power	1HP
Voltage	110/220V
Power consumption	580W
Ampere	4.7A/2.3A
Max. airflow	38000m ³ /H
Air flow distance	40m
Wind speed switching	6 sections
Vane	49" (plastic steel)
Weight	58kg
Dimension	W157XD76XH169cm

Item	DC variable frequency
Model no.	PD54T
Product name	54 inch square cart electric fan
Horse power	1.1/4HP
Voltage	110/220V
Power consumption	820W
Ampere	9.8A/5.9A
Max. airflow	42000m ³ /H
Air flow distance	30m
Wind speed switching	6 sections
Vane	50" (stainless steel)
Weight	80kg
Noise	≤70dB
Dimension	W150xD65xH170cm

Item	AC current	DC variable frequency
Model no.	28 inch negative pressure electric fan	
Horse power	1/3HP	
Voltage	220V single phase/ three phases 220V single phase	
Number of polarity	8P	6P
Power consumption	400W	230W
Ampere	2A	1.5A
Max. airflow	13000m ³ /H	15000m ³ /H
Weight	22Kg	
Noise	≤68dB	
RPM	860 Tunable	
Waterproof level	IP55	
Vane material	Plastic steel	
Dimension	W76XD46XH76CM	

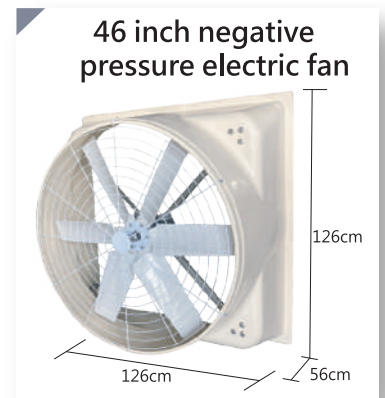

Item	AC current	DC variable frequency
Model no.	32 inch negative pressure electric fan	
Horse power	1/2HP	
Voltage	220V single phase/ three phases	220V single phase
Number of polarity	8P	6P
Power consumption	550W	350W
Ampere	3A	2A
Max. airflow	15000m ³ /H	16000m ³ /H
Weight	22Kg	24Kg
Noise	≤68dB	
RPM	860	Tunable
Waterproof level	IP55	
Dimension	W85XD45XH85CM	

Item	AC current	DC variable frequency
Model no.	42 inch negative pressure electric fan	
Horse power	3/4HP	
Voltage	220V three phases	220V single phase / three phases
Number of polarity	12P	10P
Power consumption	880W	650W
Ampere	3.6A	2.8A
Max. airflow	32000m ³ /H	
Weight	42Kg	43Kg
Noise	≤70dB	≤68dB
RPM	540	Tunable
Waterproof level	IP55	
Dimension	W107XD55XH107CM	


Item	AC current	DC variable frequency
Model no.	46 inch negative pressure electric fan	
Horse power	3/4HP	
Voltage	220V three phases / 220V single phase/three phases	
Number of polarity	12P	8P
Power consumption	980W	750W
Ampere	4.2A	3.5A
Max. airflow	36000m ³ /H	
Weight	46Kg	
Noise	≤72dB	≤68dB
RPM	540	Tunable
Waterproof level	IP55	
Dimension	W126XD56XH126CM	




Negative pressure electric fan series

Professional planning of air circulation and temperature reduction equipment Dust, odor


54 inch negative pressure electric fan

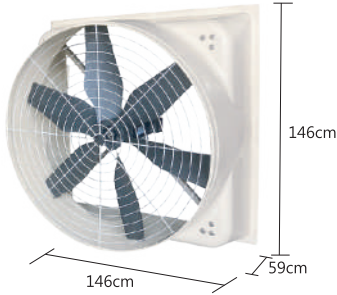

PP fine water curtain

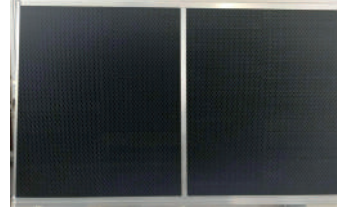

7090 water wall use (fiber paper)

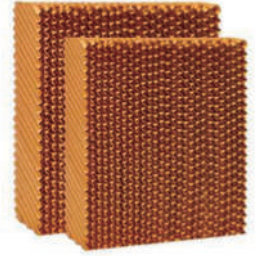


Item	AC current	DC variable frequency
Model no.	54 inch negative pressure electric fan(black)	54 inch negative pressure electric fan (white)
Horse power	1HP	
Voltage	220V three phases	220V single phase/ three phases
Number of polarity	12P	8P
Power consumption	963W	850W
Ampere	5A	3.8A
Max. airflow	40000m ³ /H	45000m ³ /H
Weight	52Kg	52Kg
Noise	≤72dB	≤68dB
RPM	500	Tunable
Waterproof level	IP55	
Dimension	W146XD59XH146cm	

Item	
Model no.	75-07
PP water curtain piece	PP water curtain plate 75 type
Upper and lower slot	Aluminum alloy 11Kg(reinforced)
Side	Aluminum alloy 4.3Kg
Solid plate	Aluminum alloy 0.9Kg
Anti-water board	PVC
Water spraying pipe	32#
Lower water end	PP
Ball valve	32#
Tee	32#
Rack	Zinc-plated

Item	
Model no.	7090 A class
Fiber paper	105G
Number Of sheet	85 sheets
Glue	Double latex
Package	5 pcs package
Dimension	1800X600X150

(Dimension can be customized)

5090 water cooling fan use (Water curtain paper)

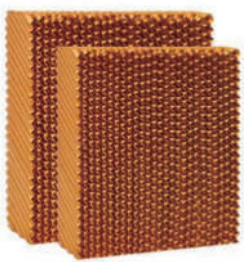


24 inch hanging fan (single/double round net)



Single round net

22 inch hanging fan (single/double round net)

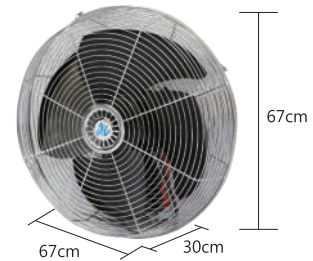

Doble round net

Item	
DC-22	1180 x 1110 x 100
DC-15	1000 x 915 x 120
JC-05	480 x 445 x 90 (rear)
JC-05	600 x 230 x 60 (side)

Item	AC current
Model no.	24 inch single round net round hanging circulation fan
Horse power	1/4HP
Voltage	110/220V phases
Number of polarity	6P
Power consumption	250W
Ampere	2.2A
Max. airflow	7000m ³ /H
Air flow distance	25m
Wind speed switching	1 section
Vane	20" 4pcs
Weight	12kg
Noise	≤60dB
RPM	1160
Dimension	W67XD30XH67cm


Item	AC current	DC variable frequency
Model no.	22 inch double round net round hanging circulation fan	
Horse power	1/4HP	
Voltage	110/220V phases	110/220V single phase
Number of polarity	6P	
Power consumption	220W	200W
Ampere	2.2A	1.2A
Max. airflow	8000m ³ /H	10000m ³ /H
Air flow distance	20m	
Wind speed switching	1 section	6 sections
Vane	20" 4pcs	
Weight	12kg	
Noise	≤60dB	
RPM	1160	
Dimension	W67XD30XH67cm	




Room temperature farming circulation electric fan /Square negative pressure fan

MIT (Made in Taiwan) / Energy saving and environment friendly


24 inch strong circulation fan

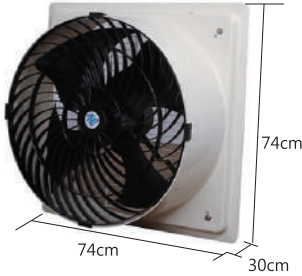

42 inch strong circulation fan

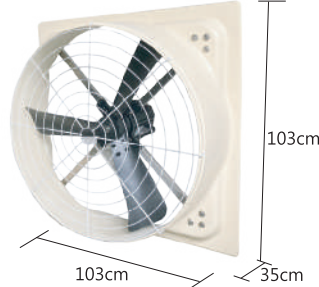

54 inch strong circulation fan

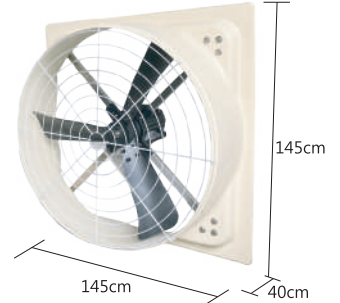


Item	For agricultural and farming use
Model no.	24 inch strong circulation fan
Horse power	1/3HP
Voltage	110/220V
Power consumption	510W
Ampere	2A
Max. airflow	12000m ³ /H
Air flow distance	35m
Vane	24" 4pcs
Weight	14.6kg
Noise	≤60dB
RPM	840
Dimension	W74XD30XH74cm


Item	AC Current	DC variable frequency
Model no.	42 inch strong circulation fan	
Horse power	3/4HP	11/4HP
Voltage	220V three phases	220V three phases /single phase
Number of polarity	12P/10P	8P
Power consumption	950W	580W
Ampere	3.6A	3.8A
Air flow distance	40m	45m
Vane	36" 6 pcs/3 pcs	36"
Weight	42kg	42kg
Noise	≤75dB	≤70dB
RPM	630	550
Dimension	W103XD35XH103cm	

Item	AC Current
Model no.	54 inch strong circulation fan
Horse power	1HP
Voltage	220V three phases
Power consumption	1300W
Number of polarity	10P/12P
Amper	5.6A
Air flow distance	45m
Vane	50" 3pcs/6pcs
Weight	48kg
Noise	≤73dB
RPM	600
Dimension	W145XD40XH145cm


DC environment friendly air conditioner

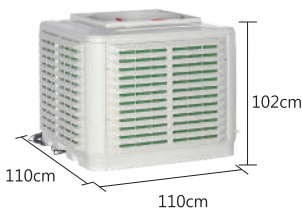

36 inch square negative pressure fan

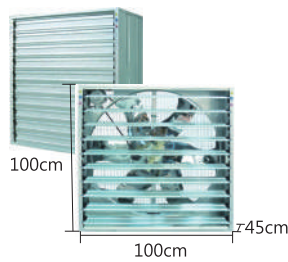

50 inch square negative pressure fan

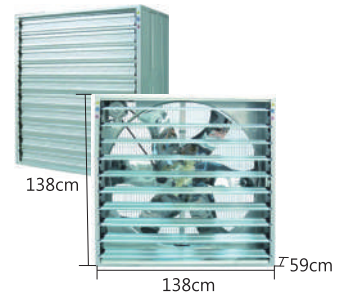

Item	DC variable frequency
Model no.	Environment friendly air conditioner:general type
Voltage	220V single phase/three phases
Power consumption	1200W
Ampere	4.5A/3A
Max. airflow	22000m ³ /H
Air flow distance	30m(12 air outlets can be opened)
Circulation water volume	50L
Vane	24" 3pcs
Weight	60kg
Noise	≤70dB
RPM	860
Dimension	W110XD110XH102cm

Item	AC current
Model no.	36 inch square negative pressure fan
Horse power	3/4HP
Voltage	220/three phases
Ampere	2.8A
Wind speed	Single speed
Vane material	Stainless steel 6 vanes
Vane rotational speed	450rpm
Air flow	32000m ³ /H
Waterproof level	IP54
Vane	36" 6pcs
Weight	50Kg
Noise	≤70dB
Material	Zinc-pated pate shell;stainless steel van
Dimension	W100XD45XH100cm

Item	AC current
Model no.	50 inch square negative pressure fan
Horse power	1HP
Voltage	220/three phases
Ampere	3.8A
Wind speed	Single speed
Vane material	Stainless steel 6 vanes
Vane rotational speed	380rpm
Air flow	45000m ³ /H
Waterproof level	IP54
Vane	50" 6pcs
Weight	65Kg
Noise	≤73dB
Material	Zinc-pated pate shell;stainless steel van
Dimension	W138XD59XH138cm